


Project:	Application Identification Stripe (Note 2) <i>White or None</i> <i>Blue</i> <i>Green</i> <i>Orange</i> <i>Yellow</i>						
Owner:		ASTM C443-05 Section 6.1 (Standard)	X	X			
Engineer:		ASTM C443-05 Section 6.2 (Oil Resistant)				X	X
Contractor:		ASTM C361-05 Section 6.9 (Standard : Physicals to 6.9.1.1)		X			
Producer:		ASTM C361-05 Section 6.9 (Oil-Resistant: Physicals to 6.9.1.2)				X	X
Date:		ASTM C1619-05 (Standard: Physicals to Class A)		X			
Comments:		ASTM C1619-05 (Oil-Resistant: Physicals to Class B)				X	X
		ASTM C1619-05 (Standard: Physicals to Class C)	X	X			
		ASTM C1619-05 (Oil-Resistant: Physicals to Class D)				X	X
		ASTM C1619-05 (Standard: Physicals to Class E)		X			
		ASTM C1677-09 (Standard)	X	X			
		ASTM C1677-09 (Oil-Resistant)				X	X
		ASTM C425			X		
		California Greenbook (Standard)			X		
		California Greenbook (Oil-Resistant)					X
		CSA A257.3 (Standard)	X	X			
		CSA A257.3 (Oil-Resistant)				X	X
		X indicates applicable specification for which gasket will meet the required material properties.					

Dim.	Units	175
W	in	0.833
	mm	21.16
H	in	0.697
	mm	17.70
L	in	0.565
	mm	14.35
T₁ + T₂ (Note 1)	in	0.092
	mm	2.34

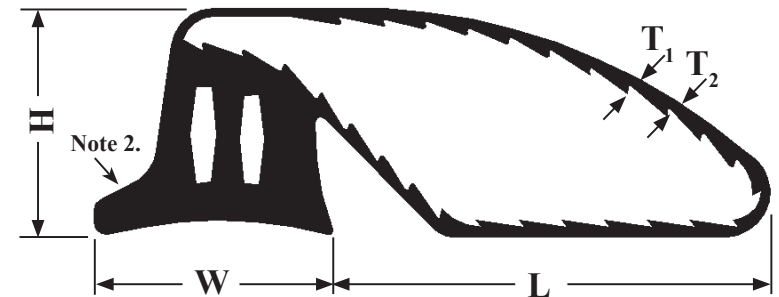

Markings: All Tylox® SuperSeal™ Gaskets are marked with the Model Number, the Size - in millimetres and inches, the cut-length in inches, the Specification Compliances, the die number, production job number, country and date of manufacture.

**TYLOX SUPERSEAL 175 XXMM (XX") CL=XXX" ASTM C1619 CLASS C, C443, CSA A257.3, HK1575
JOB NO XXX-XX-XXXX USA MMM/DD/YYYY**

Note 1. T₁ + T₂ represents 2x the mean wall thickness, and is the minimum size allowance for the Annular Space between Bell and Spigot, prior to the offset step.

Note 2. Application Identification Stripe runs, circumferentially, along the top of the gasket nose.

HK Hamilton Kent
Sealing Your Connection

TSS 175 Submittal Drawing

Drawing: HKS-A-10004-ER6

Date: Apr 24 2013 Scale: NTS

Drawn: AS Check: PS