


Project:	Application Identification Stripe (Note 2) <i>White or None</i> <i>Blue</i> <i>Green</i> <i>Orange</i> <i>Yellow</i>						
Owner:		ASTM C443-05 Section 6.1 (Standard)	X	X			
Engineer:		ASTM C443-05 Section 6.2 (Oil Resistant)				X	X
Contractor:		ASTM C361-05 Section 6.9 (Standard : Physicals to 6.9.1.1)		X			
Producer:		ASTM C361-05 Section 6.9 (Oil-Resistant: Physicals to 6.9.1.2)				X	X
Date:		ASTM C1619-05 (Standard: Physicals to Class A)		X			
Comments:		ASTM C1619-05 (Oil-Resistant: Physicals to Class B)				X	X
		ASTM C1619-05 (Standard: Physicals to Class C)	X	X			
		ASTM C1619-05 (Oil-Resistant: Physicals to Class D)				X	X
		ASTM C1619-05 (Standard: Physicals to Class E)		X			
		ASTM C1677-09 (Standard)	X	X			
		ASTM C1677-09 (Oil-Resistant)				X	X
		ASTM C425			X		
		California Greenbook (Standard)			X		
		California Greenbook (Oil-Resistant)					X
		CSA A257.3 (Standard)	X	X			
		CSA A257.3 (Oil-Resistant)				X	X

X indicates applicable specification for which gasket will meet the required material properties.

Dim.	Units	176
W	in	0.825
	mm	20.95
H	in	0.735
	mm	18.67
L	in	0.695
	mm	17.65
T ₁	in	0.086
	mm	2.18

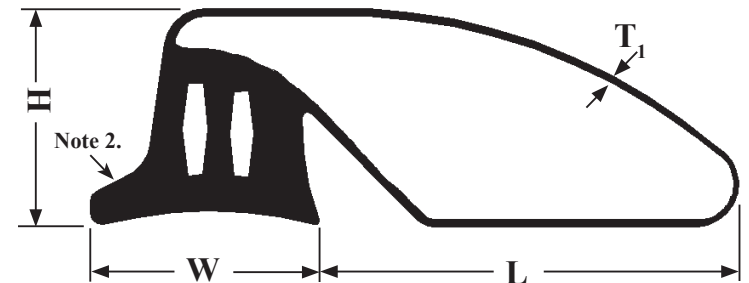

Markings: All Tylox® SuperSeal™ Gaskets are marked with the Model Number, the Size - in millimetres and inches, the cut-length in inches, the Specification Compliances, the die number, production job number, country and date of manufacture.

**TYLOX SUPERSEAL 176 XXMM (XX") CL=XXX" ASTM C1619 CLASS C, C443, CSA A257.3, HK1626
JOB NO XXX-XX-XXXX USA MMM/DD/YYYY**

Note 1. T₁ represents 2x the mean wall thickness, and is the minimum size allowance for the Annular Space between Bell and Spigot, prior to the offset step.

Note 2. Application Identification Stripe runs, circumferentially, along the top of the gasket nose.



TSS 176 Submittal Drawing

Drawing: HKS-A-10005-ER5

Date: Apr 24 2013 **Scale:** NTS

Drawn: AS **Check:** PS