


Project:	Application Identification Stripe (Note 2)	<i>White or None</i>	<i>Blue</i>	<i>Green</i>	<i>Orange</i>	<i>Yellow</i>	
Owner:		ASTM C443 (Standard)	X	X	X		
Engineer:		ASTM C443 (Oil-Resistant)				X	X
Contractor:		ASTM C361 (Standard)		X			
Producer:		ASTM C361 (Oil-Resistant)				X	X
Date:		ASTM C1619 Class A (Standard)		X			
Comments:		ASTM C1619 Class B (Oil-Resistant)				X	X
		ASTM C1619 Class C (Standard)	X	X	X		
		ASTM C1619 Class D (Oil-Resistant)				X	X
		ASTM C1619 Class E (Standard)		X			
		ASTM C1677 (Standard)	X	X	X		
		ASTM C1677 (Oil-Resistant)				X	X
		ASTM C425			X		
		California Greenbook (Standard)			X		
		CSA A257.3 (Standard)	X	X	X		
		CSA A257.3 (Oil-Resistant)				X	X
X - indicates applicable specification for which gasket will meet the required material properties for the application.							


Dim.	Units	135
W	in	0.712
	mm	18.08
H	in	0.610
	mm	15.49

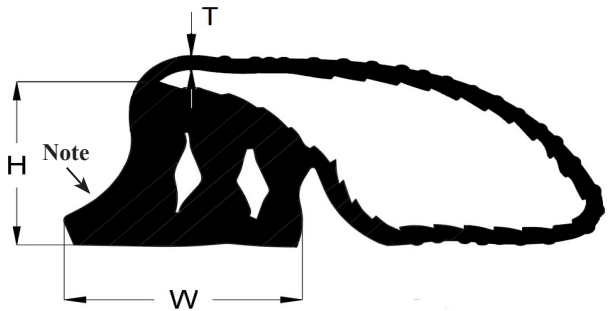

Markings: All Tylox® SuperSeal™ Gaskets are marked with the Model Number, size in millimetres and inches, cut length in inches, specification compliances, die number, production job number, country and date of manufacture.

**TYLOX SUPERSEAL 135 XXMM (XX") CL=XXX" ASTM C1619 CLASS C, C443, CSA A257.3, HK1525
JOB NO XXX-XX-XXXX USA MMM/DD/YYYY**

Note: Application identification stripe runs circumferentially along the top of the gasket nose.

	
TSS 135 Submittal Drawing	
Drawing: HKS-A-10002-R9	
Date: Nov 24, 2020	Scale: NTS
Drawn: AS	Check: PS