Project:

Owner:

Engineer:

Contractor:

Producer:

Date:

Comments:

Application Identification Stripe (Note 2)	*White or None*	*Blue*	*Green*	*Orange*	*Yellow*
ASTM C443 (Standard)	X	X	X		
ASTM C443 (Oil-Resistant)				X	X
ASTM C361 (Standard)		X			
ASTM C361 (Oil-Resistant)				X	X
ASTM C1619 Class A (Standard)		X			
ASTM C1619 Class B (Oil-Resistant)				X	X
ASTM C1619 Class C (Standard)	X	X	X		
ASTM C1619 Class D (Oil-Resistant)				X	X
ASTM C1619 Class E (Standard)		X			
ASTM C1677 (Standard)	X	X	X		
ASTM C1677 (Oil-Resistant)				X	X
ASTM C425			X		
California Greenbook (Standard)			X		
CSA A257.3 (Standard)	X	X	X		
CSA A257.3 (Oil-Resistant)				X	X
X - indicates applicable specification for which gasket will meet the required material properties for the application.					

Dim.	Units	176
W	in	0.825
	mm	*20.95*
H	in	0.735
	mm	*18.67*

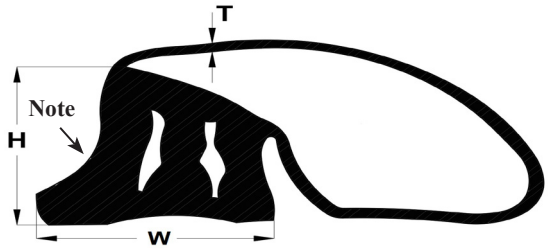

Markings: All Tylox® SuperSeal™ Gaskets are marked with the Model Number, size in millimetres and inches, cut length in inches, specification compliances, die number, production job number, country and date of manufacture.

TYLOX SUPERSEAL 176 XXMM (XX") CL=XXX" ASTM C1619 CLASS C, C443, CSA A257.3, HK1626
JOB NO XXX-XX-XXXX USA MMM/DD/YYYY

Note: Application identification stripe runs circumferentially along the top of the gasket nose.

Hamilton Kent
Sealing Your Connection

TSS 176 Submittal Drawing

Drawing: HKS-A-10005-R7

Date: Nov 24, 2020	**Scale:** NTS
Drawn: AS	**Check:** PS